


Radcom Slim Portable

Technical Specifications

RadCom Slim Portable PACS Workstation



Powerful Processing up to Intel® Core™ i7



AMD® Radeon™ High End Graphics



Proven Protection by Pelican™

Client Centric, Results Driven

Empower your radiology workforce with the RadCom Slim Portable PACS Workstation, designed and developed to meet your radiologists' workstation requirements to work from anywhere.

Inspired, Reliable Design

The RadCom Slim Portable features a proprietary waterproof and shockproof small form factor chassis and display mounting to keep your equipment safe and secure on the ground or in the air, certified components and multiple monitor configuration options, delivering reliable remote performance and peace of mind.

Best-in-class Security

Every RadCom Slim Portable provides secure, seamless access to your data – your most important asset.

Easy Manageability

Dextro Imaging Solutions features help save your radiologists' time and increase IT efficiency. Including a 3MP diagnostic and clinical displays and peripherals, the RadCom Slim Portable is an agnostic all-in-one workspace supporting remote reading from any location with an internet connection.


A Single Point of Contact

The RadCom Slim Portable includes Dextro Imaging Solutions' remote desktop support, providing your business with more flexibility – especially for hard-to-reach, remote locations.

| Feature | Specifications |
|--------------------------------------|--|
| Processors | 8 th and 9 th generation Intel Core processors up to i7 (Custom Available) |
| Chipset | Intel-OS Dependent |
| Operating System Options | Microsoft® Windows 10 Pro 64-bit, Windows 10 Standard 64-bit |
| Graphics | Embedded AMD Radeon RX Vega M GL (Per Request: Barco® Cards Available) |
| Memory (RAM) | 16-32GB DDR4 DDR4 SDRAM, up to 32GB |
| Networking | 1 x Integrated Ethernet LAN 10/100/1000, 5G support, Thunderbolt |
| Interfaces | 3 x rear static USB 2.0 ports 2 x rear DVI 1.2 ports 1 x internal power button |
| Removable Media Options | Supports external USB optional optical disc drives and USB thumb drives |
| Hard Drive Options | Hard Disk Drive: up to 1TB M.2 Solid State Drive |
| Display Options | Diagnostic: Choice of 3MP diagnostic display (Current selection available online) Clinical: 2 x 17" LCD touch screen displays |
| Chassis Type | SFF, wheeled base with extendable handle |
| Case Dimensions (L x W x H) | 22 x 10 x 17 in / 55.9 x 25.4 x 43.2 cm |
| Min. Weight | 47.5 lbs / 21.5 kg |
| Power Supply Unit (PSU) | 1 x standard 400W PSU Active PFC ENERGY STAR compliant, Active PFC, SPLIT |
| Included | System soundproofing, quiet Maglev fans |
| Accessories | Keyboard: Backlit slim mechanical spill-proof USB wired keyboard Mouse: Logitech® wireless mouse Video Display Wiring included Security Lock upon request |
| Security | Trusted Platform Module (TPM) 1.2, Available Data Protection Encryption, Chassis lock slot support, Setup/BIOS Password, I/O Interface Security, optional Smart Card keyboards, Intel Trusted Execution Technology, Intel Identity Protection Technology, Intel Ant-Theft Technology, BIOS support |
| Systems Management Options | In-Band systems management |
| Environmental & Regulatory Standards | Environmental Standards (eco-labels): ENERGY STAR 5.2, EPEAT Registered, CECP, WEEE, Japan Energy Law, South Korea E-standby, South Korea Eco-label (for SFF only), EU RoHS, China RoHS Other Environmental Options: Carbon Off-set; Asset Resale and Recovery Service |
| Warranty & Service | Limited Hardware Warranty |
| Configuration Services | Factory image load, BIOS customization, hardware customization, asset tagging, reporting available at extra charge. |

© 2021 Dextro Imaging Solutions, LLC. All Rights Reserved. All products and company names are trademarks™ or registered® trademarks of their respective holders. Use of them does not imply any affiliation or endorsement by them.

External:

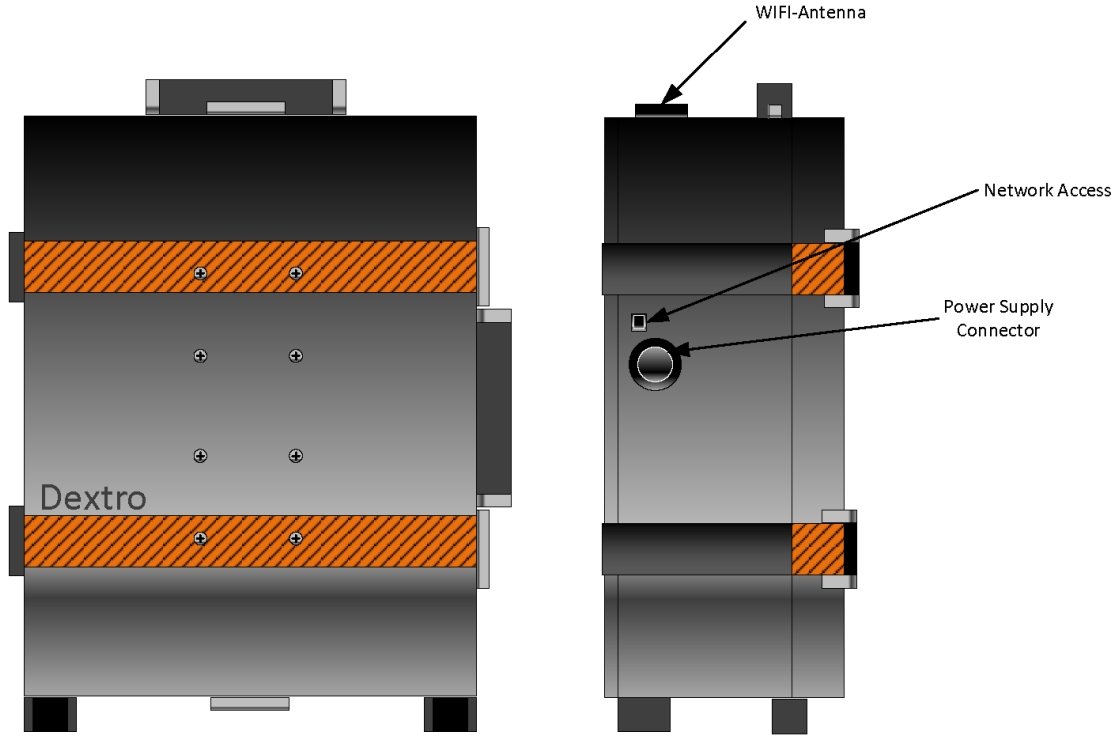

Internal:

